




set-up instructions

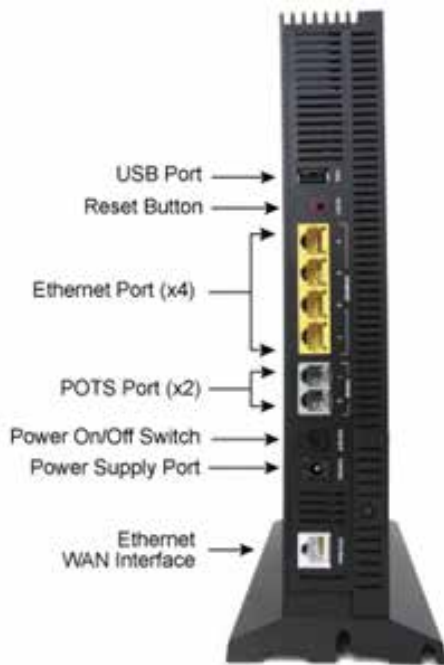

1. Connect your existing CAT5e Ethernet cable to the white Ethernet WAN interface on the back of the 844e Residential Gateway.
2. Connect the power to the 844e Residential Gateway.
3. Allow the 844e Residential Gateway to boot up. {about four minutes}
 - If the 844e does not turn on, make sure the On/Off Switch is pushed in.
4. Connect your Internet device to the 844e Residential Gateway with the supplied white Cat5e Ethernet cable to access the Internet.

connecting wirelessly

1. Look up the WiFi information on the sticker on the side of your 844e Residential Gateway. {write down the SSID & WPA Key}
2. On your device, search for the WiFi networks
3. Click on your network {it is the same as your SSID from earlier}
4. It will ask you to enter your password {input the WPA Key from earlier}
5. To have the SSID & WPA Key changed to a personalized one, contact **Tech Support** at **866-881-4REV**

SSID: CXNK000006F
ONU MAC: 00063103707E
Security Type: WPA2.AES
WPA Key: def7c9670774bf96
IP Address: 192.168.1.1
User/Password: admin/4e056bb5c



led guide



POWER LED

Solid Green	844e is up and running
Solid Red or Amber	Error, contact tech support
Flashing Amber	844e is installing update

BROADBAND LED

Solid Green	Broadband connection is complete
-------------	----------------------------------

SERVICE LED

Solid Green	Internet service is complete
Solid Amber	Error, contact tech support
Solid Red	Failed to receive IP, contact tech support

WiFi 2.4 GHz | WiFi 5 GHz | Ethernet 1-4

Solid or flashing Green	Devices are connected and active
-------------------------	----------------------------------